




The World Leader
In Data Elimination

SSC-25SSD IRONCLAD®
SPACESAVER with IRONCLAD Erasure Verification System

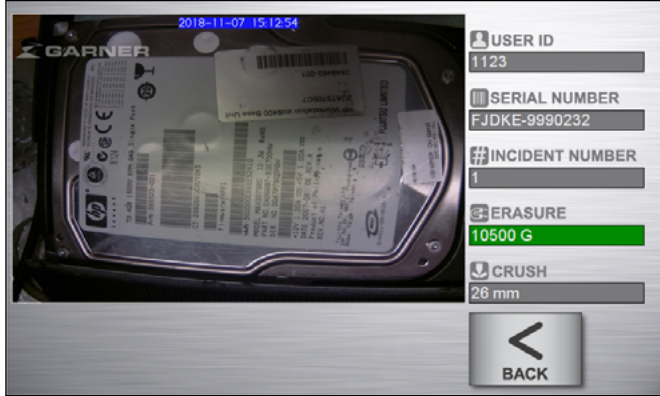

Proof of erasure image



(Patent pending)

SPACESAVER IRONCLAD® Includes

- HD-2XTSS high-speed hard drive and tape degausser
 - » Completely erases all data in 8 seconds
 - » 10,000 Gauss (1 Tesla)
- PD-5 NSA-listed hard drive destroyer
 - » 20 second crush time
 - » 10+ tons force
- SSD-1 patented solid-state destroyer
 - » 90 pins punctures individual memory chips
 - » Works exclusively with PD-5 destroyer
- Garner's exclusive IRONCLAD Erasure and Destruction Verification Report System
 - » Image capture system
 - » Touchscreen control head
 - » Report generating software
 - » Scanner

SPACESAVER Compliance

The complete, secure hard drive & flash media destruction solution in a small footprint.

IRONCLAD® Erasure & Destruction Verification System

- Tracks and stores media serial numbers, user ID, witness ID, and date in a password-protected system
- Provides proof media was degaussed by capturing a JPG image of the hard drive immediately after degaussing
- Records gauss field strength (exclusive to HD-2XTSS)
- Informs operator of erasure results with a green "PASS" or red "FAIL" after each cycle
- Records and documents the crush depth of the PD-5 hard drive and solid-state destroyer
- Generates exportable JPG images and destruction results for audit and archival purposes in PDF, CSV, and Excel file formats
- Provides a series of automatic prompts to take the operator through a defined, repeatable, and consistent process of secure and thorough media sanitization
- Compatible with current Garner degaussers, the PD-5 destroyer, and the SSD-1 solid-state destroyer



Secure and Compliant

The SSC-25SSD will help you meet government and industry standards requiring complete erasure of sensitive data prior to disposal, including:

- **California Senate Bill 1386**
- **DOD** Up to Secret Classification
- **GDPR** (General Data Protection Regulation)
- **GLBA** (Gramm-Leach-Bliley Act)
- **HIPAA** (Health Information Portability and Accountability Act)
- **IRS 1075**
- **NIST SP 800-88r1**
- **PCI DSS 3.2** (Payment Card Industry Data Security Standard)
- **PIPEDA** (Personal Information Protection and Electronic Documents Act)
- **TAA**

Interfaces:



1. Ethernet
2. 4 USB (to connect with: HD-2XT, bar-code scanner, thumb drive, or optional mouse, and keyboard)
3. HDMI
4. Power (connects to standard wall outlet)

SSC-25SSD IRONCLAD SPECIFICATIONS	
Part number	SSC-25SSD IRONCLAD • SSC-25SSDE IRONCLAD
SPACESAVER Includes	HD-2XTSS, PD-5, SSD-1, SSD-CADDY, IRONCLAD
IRONCLAD Includes	Image capture system Touchscreen control head Report generating software Scanner and stand Stylus Software support for one year
Certifications/Listing	HD-2XTSSE: CE • TAA PD-5: NSA/CSS EPL • CE • TAA IRONCLAD: CE • TAA
Magnetic Field	1 Tesla (10,000 Gauss) nominal
Erasure Verification	IRONCLAD
Charge Time	8 seconds (nominal)
Throughput (hard drives per hour)	HD-2XTSS: Up to 1920 (1.8 in.) Up to 960 (2.5 in.) Up to 240 (3.5 in.) PD-5: Up to 1,800 (2.5 in.) Up to 360 (3.5 in.)
Throughput with IRONCLAD	HD-2XTSS: Up to 180 (hard drives per hour) PD-5: Up to 180 (hard drives per hour)
Media	HD-2XTSS: Hard drives: Laptop, standard, network ¹ up to 1.5 in. in height Tape media: All LTO, all DLT, AIT, 2590 Series, 8mm, and others PD-5: Hard drives up to 2.25 in. in height SSD-1: SSD, flash USB thumb drives, mobile phones ² , SSHD controller boards Scanner: Bar-code scanner scans any type of bar-code
Power (*Factory Configurable)	HD-2XTSS: 110~125VAC ±5%, 50/60 Hz* HD-2XTSSE: 90~250VAC ±5%, 50/60 Hz* PD-5: 110~130VAC ±5%, 50/60 Hz* PD-5E: 200~240VAC ±5%, 50/60 Hz* IRONCLAD: 90~240VAC, 47-440 Hz

SSC-25SSD IRONCLAD SPECIFICATIONS	
Power Consumption	HD-2XTSS: During standby: 24W During charge: 156W (avg) At the time of erase: 60W PD-5: During standby: 90W During crush: 1200W (max) IRONCLAD: 15W
Chamber / Drawer Capacity (HxWxD)	HD-2XTSS: 4.3 x 1.5 x 5.9 (in.) 108 x 31.8 x 148.6 (mm) PD-5: 2.3 x 4.9 x 6.8 (in.) 57.4 x 123.7 x 172.2 (mm) SSD-1: 0.5 x 3 x 6 (in.) 13.2 x 73.7 x 152.4 (mm)
Weight	SPACESAVER IRONCLAD: 145 lbs (65.9 kg) Control head: 3.8 lbs (1.8 kg)
Overall Size (HxWxD)	SPACESAVER IRONCLAD: 18.1 x 17.8 x 23.4 (in.) 458.7 x 443.7 x 393.6 (mm) Control head: 6.6 x 9.6 x 2.5 (in.) 168 x 244 x 64 (mm)
Storage Capacity	16GB
Screen Size	7 in.
Warranty	HD-2XTSS • PD-5: One-year manufacturer's limited warranty standard, optional three-year limited warranty available HD-2XTSSE • PD-5E • IRONCLAD: One-year manufacturer's limited warranty standard SSD-1 • SSD-CADDY • Scanner: Ninety-day manufacturer's limited warranty standard
Made In U.S.A.	By Garner Products, Inc.

¹Enterprise SSDs must have rack mounts and metal casings removed prior to degaussing or destruction

²All items must have the battery removed prior to degaussing or destruction

Note: Hard drives and some tapes are not reusable after being degaussed.

GarnerProducts.com

Garner Products Inc.
10620 Industrial Avenue
Suite 100
Roseville, CA 95678 USA

1-800-624-1903

Tel: 916-784-0200 Fax: 916-784-1425

Prices and specifications subject to change without notice.

©2021 Garner Products, Inc. All rights reserved.

